



# Instruction Sheet

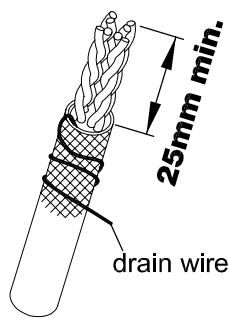

**Step 1:**


Strip a minimum of 25mm of jacket from the end of the cable, pull the foil or braided shield back over the jacket as shown and wrap the drain wire around the shield.

NOTES: Insulation displacement connector (IDC) is suitable for 22~26 AWG solid wire.

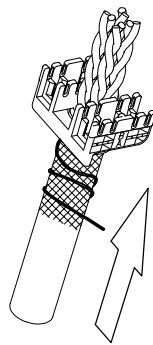


**Step 2:**

Insert the wires from the stripped cable into the cap through the hole as shown.

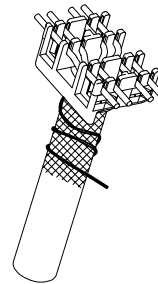


**Step 3:**

Insert the wires into their correct positions based upon the color code.

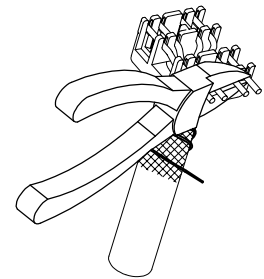


**Step 4:**

Cut the excess wire off as close to the edge of the cap as possible.

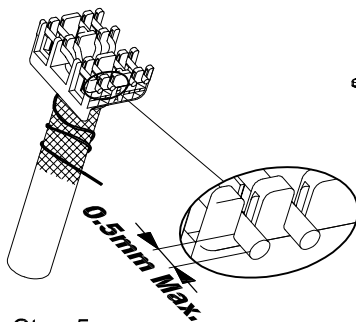


**Step 5:**

The tips of the wires should protrude no more than 0.5mm.

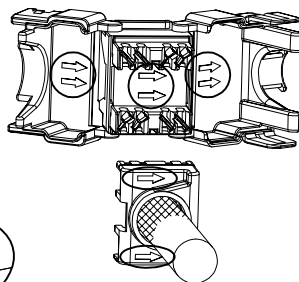


**Step 6:**

Make sure that the arrows on the jack and the cap face in the same direction.

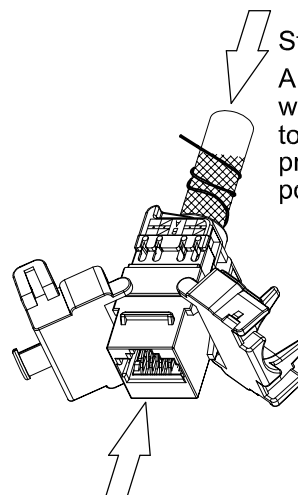


**Step 7:**

Align the cap with the IDC towers and press it into position.

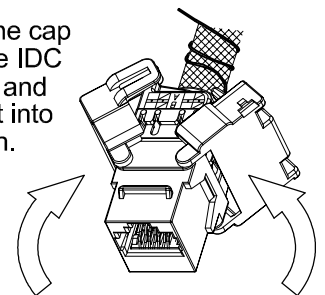


**Step 8:**

Rotate the wings toward each other until they snap closed.

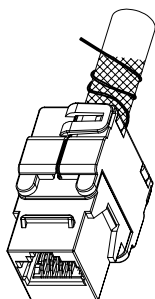

**Step 9:**


Ensure that the drain wire is wrapped around the cable and shield.

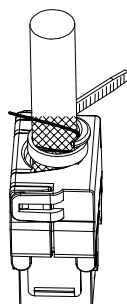

**Step 10:**


Tie-wrap the drain wire to the shield. Do not over tighten the tie wrap! It should be snug, but not so tight that it crushes the wires.

## Disassembly Instruction:

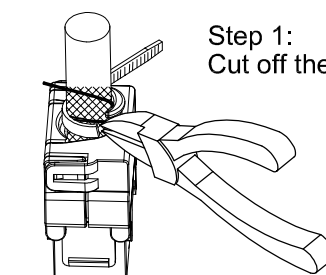

**Step 1:**

Cut off the cable tie.

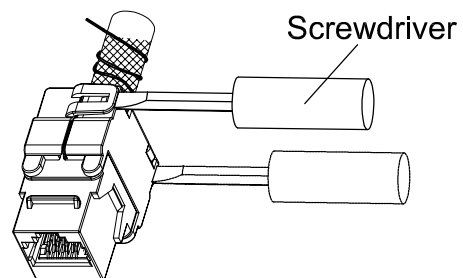

Screwdriver

**Step 2:**

In order to remove the connector clip, insert a small screwdriver into the slot.