



60A-66-56-36BL

EUROLAN

Model Number: 60A-66-56-36BL

Model Name: **METERED PDU**

Date: 2020-06-18

APPROVED	CHECKED	ISSUED
		

Specification

Function :


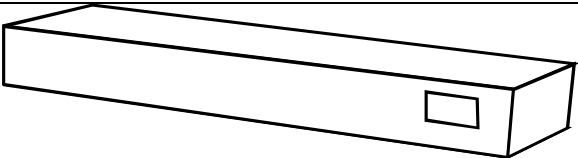
- Circuit Breaker Protection
- LED Displays Power Status

Specification

Interface	Number	Function	Protocol/Specification
LED	2		Power Status
RJ11	2		Ready for CPM
General			
Output	36		30 x IEC320 C13 6 x IEC320 C19
Input	1		IEC309
Circuit Breaker	2		16 Amp
Nominal Voltage			230V
Voltage			200~240V
Max. Output current			32 Amp
Frequency			50/60HZ full range
Operation			
Temperature			0 ~ 65 Celsius degree
Humidity			0% ~ 90%
Size			56 x 1645 x 44 mm
Weight			7.8 kg
Line Drawing			
<p>The line drawing illustrates the physical dimensions of the power distribution unit. The top view shows a rectangular layout with a total length of 1645.00 mm and a width of 56.00 mm. The side view shows a height of 44.00 mm. The front view details the component arrangement: a power input connector on the left, followed by two circuit breaker modules, a central LED display, and six output ports (three IEC320 C13 and three IEC320 C19) on the right.</p>			

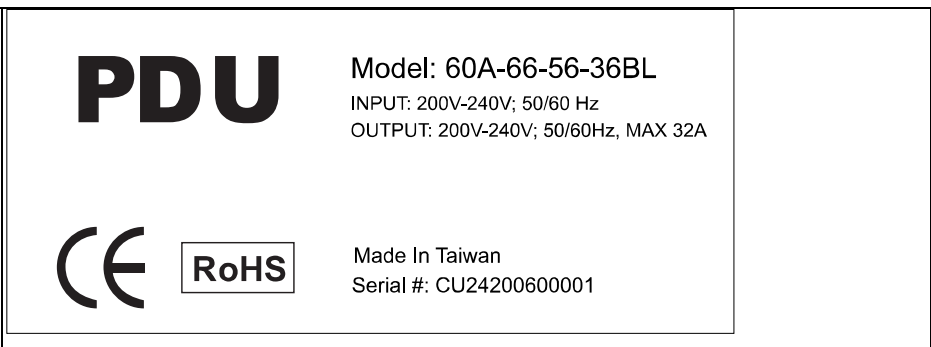
Package

Box

Box Material	Brown Box
Box Size	189 x 22 x 11 cm
Gross Weight	9 kg
Label Size	1 piece, 80x130mm
Label	
Location	

Product

Pack	Bubble Bag
Label Size	1 piece, 30x70mm silver label,

Label	 <p>The label content includes the following information:</p> <ul style="list-style-type: none"> PDU (Large bold text) Model: 60A-66-56-36BL INPUT: 200V-240V; 50/60 Hz OUTPUT: 200V-240V; 50/60Hz, MAX 32A CE (Large logo) RoHS (Text in a box) Made In Taiwan Serial #: CU24200600001
Location	At the center bottom of the product.

Accessories

Rack mount Brackets	2 pairs, Plain plate and Bracket
Tool-less mounting Screw	2 pieces