

60A-66-65-42BL

EUROLAN

Model Number:	60A-66-65-42BL
Model Name:	METERED PDU
Date:	2019-12-04

APPROVED	CHECKED	ISSUED
		

Specification

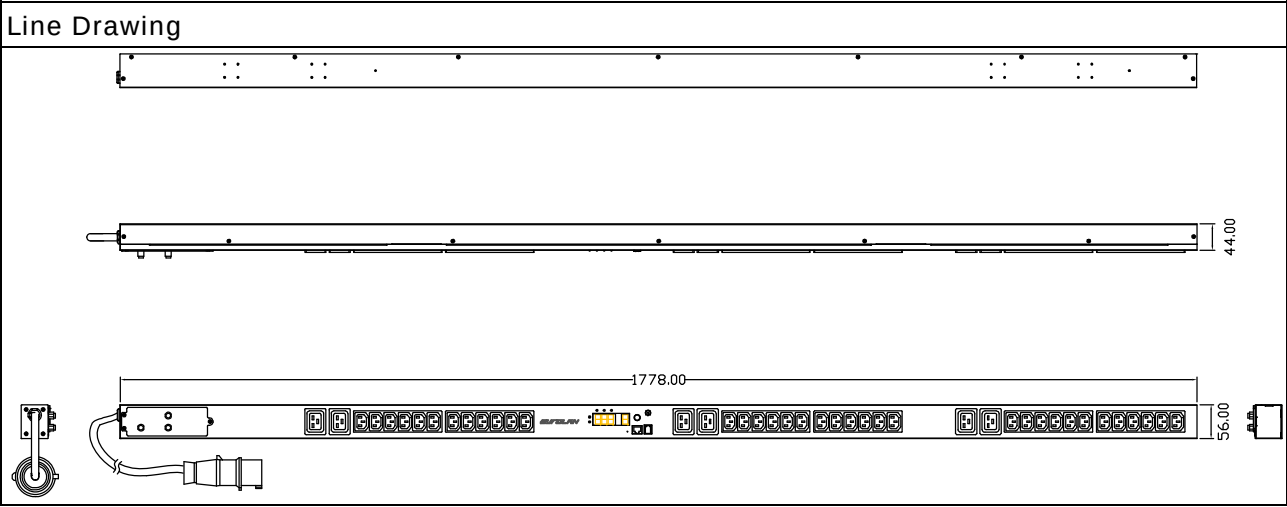
Function:

- True RMS Current Metering & Reporting
- Circuit Breaker Protection
- Local LED Displays Amps, IP Address, Temperature or Humidity
- Daily, Weekly, Monthly & Yearly Power Consumption Data
- Current, Temperature and Humidity Threshold Sensing
- User Defined Alarm Thresholds
- Alarm Notification via Email, SNMP, Syslog, LED or Audible Alarm.
- SNMP Support.
- Free Bundle Management Utility.

Specification

Interface	Number	Function	Protocol/Specification
RJ45	1	10M Ethernet	ICMP, ARP, IP, TCP, UDP, DHCP, HTTP, HTTPS, SNMPv1
RJ11	1	ENV Connection	private
Reset Hole	1	Hardware Reset	
Button	1	Function	1 beep : Current, Temp./Humidity Display 2 Beeps : IP Display. 4 Beeps : DHCP/Fixed 6 Beeps : Reset to Default
Seven Segments4 digits	3	Current	True RMS Meter: Shows the aggregate current for each bank. Range: 0A ~ 20 A Resolution: 0.1A Precision: +/-2% +/-0.1AMP
		IP	
	1	ID	ID: 1~3 for Bank , t , h
Red LED	3	Bank Status	Light when bank Power fail
Green LED	1	IP	DHCP
Green LED	42		Power Status
General			
Output Socket	36		IEC 320 C13
	6		IEC 320 C19

Interface	Number	Function	Protocol/Specification
Input Connector	1		IEC 309 with 3.0m
Circuit Breaker	3	Branch Type	16 Amp
Nominal Voltage			400V AC, 3-Phase 3P+N+PE
Voltage			230V
Frequency			50/60HZ full range
Load Capacity			11 kVA
Maximum Input Current			16 Amp
Maximum output Current (Outlet)			IEC 320 C13: 10A IEC 320 C19: 16A
Maximum output Current (Bank)			16 Amp
Operation			
Temperature			0 ~ 65 Celsius degree
Humidity			0% ~ 90%
Size			56 x 1778 x 44mm
Weight			6.2 kg



Conformance
CE, FCC

Web GUI

EUROLAN

Total load: 0.4 A , Status: Normal

Information

PDU

[System](#)

Configuration

[Threshold](#)

[User](#)

[Network](#)

[Mail](#)

[SNMP](#)

PDU

PDU

0.4 A Normal

Option Device

Temperature


N/A

Humidity

N/A

Software GUI

Windows OS Interface



Utility Login Interface

PDU Login

EUROLAN

User Name:

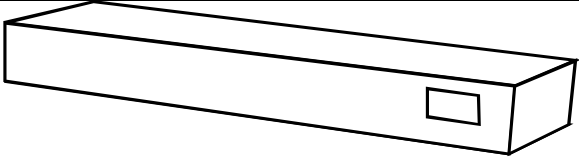
Password:

OK

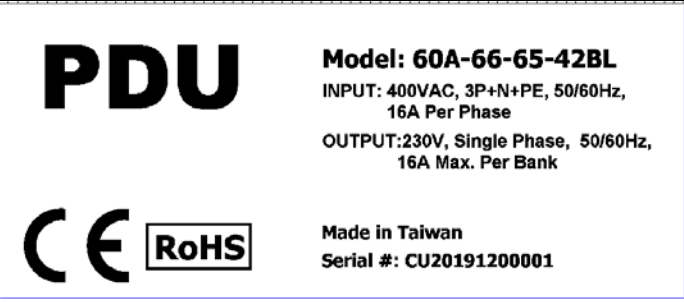
Cancel

Package

Box

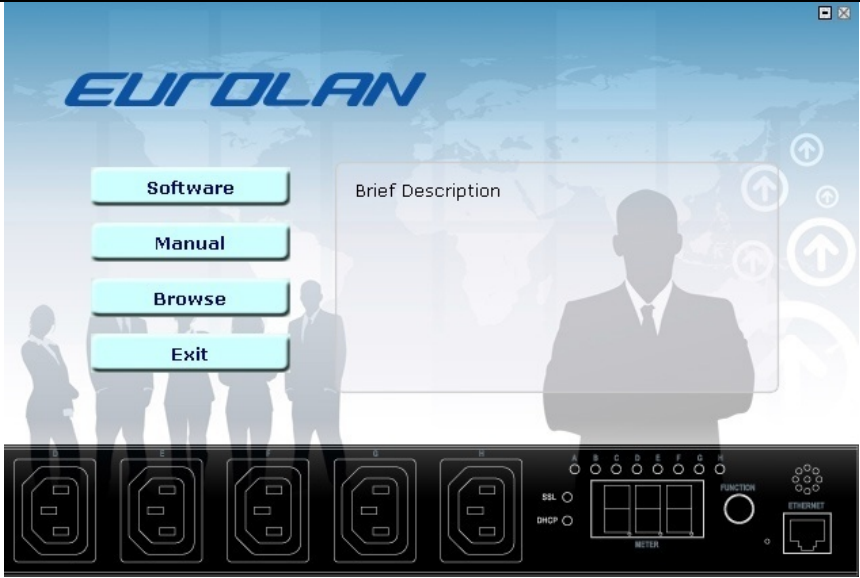
Box Material	Brown Box
Box Size	189 x 22 x 11 cm
Gross Weight	9.4 kg
Label Size	1 piece, 80x130mm
Label	 PART NO 60A-66-65-42BL   Eurolan 3-Phase Monitored PDU 0U, WYE 16A/400V, (36)C13, (6)IEC309 3.0m cord    60A-66-65-42BL Made in Taiwan QTY: 1 VN: 
Location	

Product

Pack	Bubble Bag
Label Size	1 piece, 30x70mm silver label,
Label	

Location	At the center bottom of the product.
----------	--------------------------------------

Accessories

CD	1 set
CD Cover Printing	
CD Content	PDU User Manual PDU Utility User Manual PDU utility PDU MIB Acrobat Reader
CD Auto Run Interface	
Rack mount Brackets	2 pairs, Plain plate and Bracket

Tool-less mounting Screw	2 pieces
-----------------------------	----------