
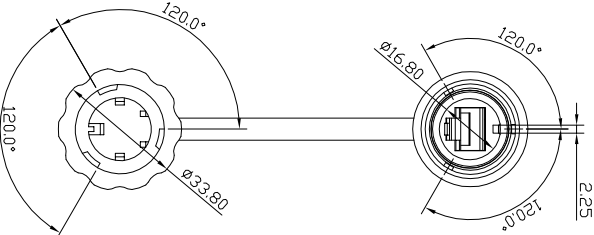


REVISIONS			
ZONE	REV	DESCRIPTION	DRAWN
A	技術移轉	EG06035	JOY
B	變更線皮印字統一編號字型	EONME12010	Winnie
C	EONME15429 (改兩件式PLUG)	10/20/15	Raymond

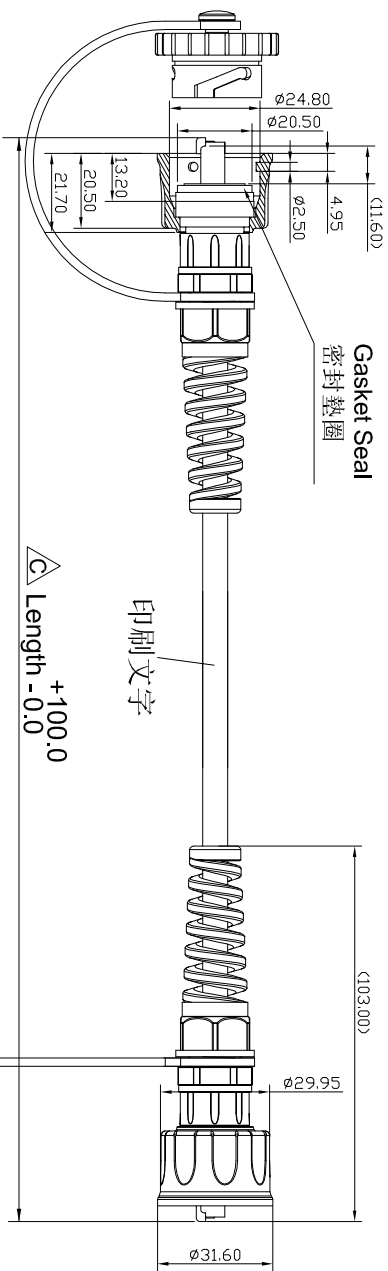

Cable Seal Assembly
耐扭外迫式緊迫頭 x2

橡膠外被Cable x1

Plug Housing x2

Fixture
固定帶 x2

Seal Cover
密封蓋 x2

Coupling Ring
連接護套 x2

CAT.5e
UTP RJ45 Plug x2

UTP外被印刷: 
HIGH FLEX INDUSTRIAL ETHERNET CABLE 4PR/24 75°C
SUN RES OIL RES CM ETL VERIFIED TO ANSI/TIA-568-C.2
Cat 5e PATCH CABLE---UTP

ELECTRICAL
Electrical Insulation Resistance : 500MΩ min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V RMS @ 60Hz for 1 minute
MECHANICAL
Insertion / Extraction Life : 750 Cycles Minimum
Tensile Strength : ≥ 20N per Wire

PHYSICAL
Housing : High-Impact, Flame-Retardant Plastic, UL 94V0
CONTACT : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold Over 100 micro-inch of Nickel
Shield Shell : Brass Alloy Plated with 50 micro-inch Nickel (FTP only)
International Protection Code meet IP67

線材料料號:LC4PR"X"M5I06-RH5EN-1(1,2,3,5,7,10M)
整捆線材料料號:LC4PR1KF06-RH5EN-1

TS68B線位圖	PIN	導體線顏色
1	1	白橙
2	2	橙
3	3	白綠
4	4	藍
5	5	白藍
6	6	綠
7	7	白棕
8	8	棕

UNLESS OTHERWISE SPECIFIED:			
PROJECT ID		TITLE	
21P-U5-XXBL		IP 67 C5E UTP patch cord	
FILE		DRAWING NUMBER	
Z2193.DWG		Z2193	
DATE		PART NUMBER	
10/13/15		REV	
CHECK		APPROVED	
Raymond		SCALE	
SURFACE		UNIT	
FINISH		SHEET 1 of 1	

EUROLAN